



430 US HWY 62/180 West, Seminole, TX 79360
 Phone 432.758.9900 • Fax 432.758.9903
 Email sales@jnlsteel.com

PROUDLY FINISHED WITH
SHERWIN-WILLIAMS.
 Coil Coatings

BUILD IT WITH STEEL

BUILD IT TO LAST







			
POLAR WHITE* SR .60 • SRI 71	LIGHT STONE* SR .50 • SRI 57	ASH GRAY* SR .48 • SRI 55	SADDLE TAN* SR .48 • SRI 55
			
DESERT SAND SR .42 • SRI 47	BROWNSTONE SR .45 • SRI 51	LIGHT BROWN SR .31 • SRI 31	COCOA BROWN* SR .28 • SRI 27
			
OLD TOWN GRAY SR .42 • SRI 47	CHARCOAL GRAY SR .27 • SRI 26	BURNISHED SLATE SR .28 • SRI 27	DARK BRONZE SR .28 • SRI 28
			
CRIMSON RED SR .38 • SRI 42	RUSTIC RED* SR .36 • SRI 31	APPLE RED SR .34 • SRI 35	BERRY SR .30 • SRI 18
			
COLONY GREEN SR .32 • SRI 31	EVERGREEN* SR .31 • SRI 31	HAWAIIAN BLUE SR .25 • SRI 24	GALLERY BLUE SR .27 • SRI 27
			
GALVALUME	IVORY SR .60 • SRI 71	COPPER METALLIC SR .45 • SRI 50	BLACK SR .30 • SRI 29

- Final color selection should be made from actual color chips.
- A 40-year limited paint warranty is available for all colors upon request. Please inquire about other warranties available, like 25 or 10-year.
- Solar Reflectivity (SR):
Solar reflectivity or reflectance is the measure of a material's ability to reflect solar energy or sunlight from its surface. SR values are numbered 0 to 1.0. A value of 0 indicates that the surface absorbs all solar energy and a value of 1.0 indicates total reflectance. ENERGY STAR requires an SR value of 0.25 or higher for steep slope roofing (above 2:12) and an SR value of 0.65 or higher for low slope roofing (2:12 or less). For more information, please visit www.energystar.gov.
- Solar Reflectance Index (SRI):
The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. To meet LEED requirements, a roofing material must have an SRI of 29 or greater for steep slope roofing and an SRI value of 78 or higher for low slope roofing. For more information, visit www.usgbc.org.


*Available in Purlin Bearing Leg.




Sheet Metal Profiles

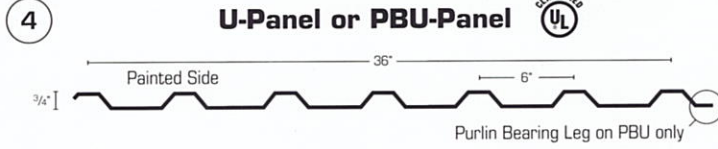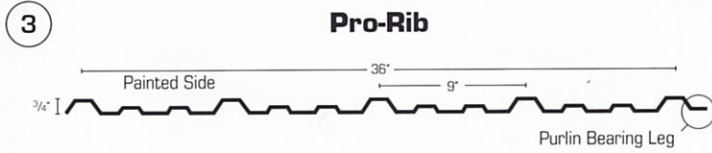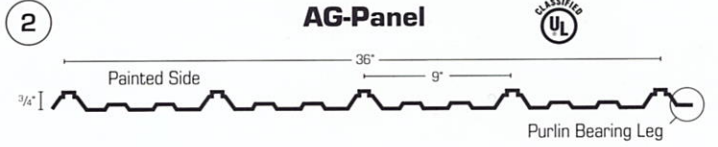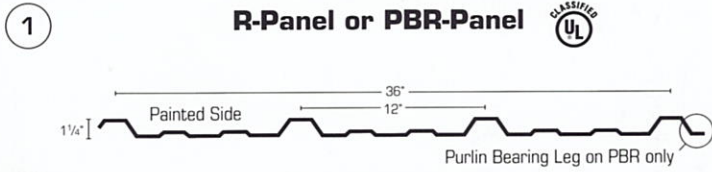


Standing Seam Profiles




5
SSG100, SSG150



6
SSG450



7
SSG675














8
FF100, FF150







9
FFQ100

Commercial Trim

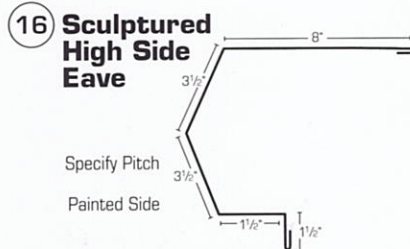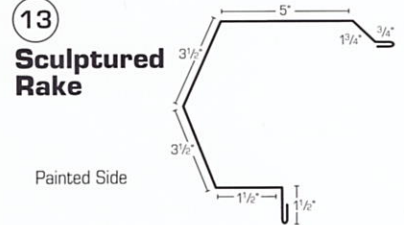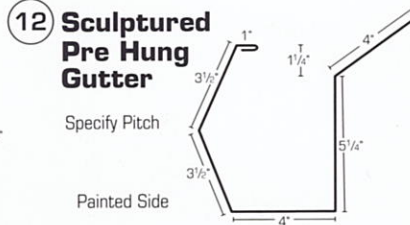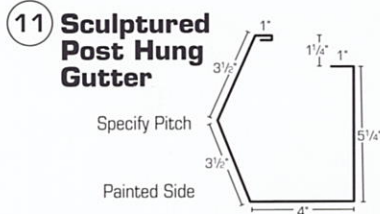

Residential Trim

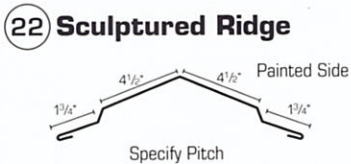

Custom Trim Available